

MIDI Solutions

Thru

OPERATING INSTRUCTIONS

MIDI Solutions Thru Operating Instructions M410-100

© 2012 MIDI Solutions Inc. All rights reserved.


MIDI Solutions Inc.
PO Box 3010
Vancouver, BC Canada
V6B 3X5

www.midisolutions.com

INTRODUCTION

Thank you for purchasing the MIDI Solutions Thru.

The MIDI Solutions Thru provides two MIDI Thru outputs from one MIDI input, allowing additional MIDI outputs to be added at any point in the MIDI chain. Active circuitry cleans up any skewing of the data bits that has occurred at the input, resulting in accurate output signals. The MIDI Solutions Thru is MIDI-powered and requires no batteries or power supply to operate.

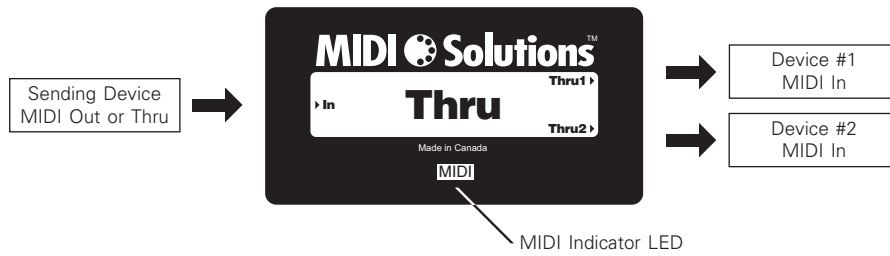

CONNECTIONS

Connect the MIDI Out or Thru of the sending MIDI device to the MIDI In of the MIDI Solutions Thru. Connect **Thru1** of the MIDI Solutions Thru to the MIDI In of the first receiving MIDI device, and **Thru2** to the MIDI In of the second receiving MIDI device. It is recommended that the number of MIDI Solutions products powered from a single MIDI Out or Thru be limited to four.

OPERATION

The MIDI Solutions Thru's MIDI Indicator LED will light as soon as the sending device is turned on, and flashes whenever MIDI data passes through the unit. All MIDI messages appearing at the MIDI input are sent to Thru1 and Thru2.

WARRANTY

MIDI Solutions Inc. warrants this product to be free from defects in material and workmanship for a period of one (1) year from date of purchase. This warranty is void if the product has been damaged by accident, misuse, alteration, unauthorized repairs or other causes not arising out of defects in material or workmanship. Under no circumstances will MIDI Solutions be liable for any loss of profits, benefits, time, interrupted operation, commercial loss, or consequential damages arising out of the use or inability to use the product. MIDI Solutions specifically disclaims any implied warranties of merchantability and fitness for a particular purpose. If the product requires service, a Return Merchandise Authorization (RMA) number must be obtained from MIDI Solutions and the product must be shipped prepaid to a specified Service Center. MIDI Solutions will repair or replace the product at our discretion and will pay return shipping fees. The customer is responsible for any damage or loss sustained during shipment in any direction.